

General Fire




3904-4004 E. Trent
Spokane, WA. 99202

800-541-4218

Call Or Visit Us On The Web

www.generalfire.com

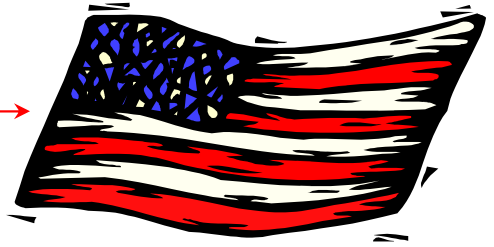

SPECIFICATION:

There shall be a spray bar installed beneath the front bumper of the chassis. Front spray bar shall be supplied with 1-1/2" flexible hose plumbed with stainless steel fittings and a 1-1/2" Akron discharge valve. The spray bar shall be equipped with three nozzles operated by KZCO electric valve actuators; one on driver's side, one on passenger's side, and one in the center. Discharge valve control to be located on pump operator's panel. A KZCO electronic control panel providing individual control to each nozzle shall be mounted in the chassis cab. All spray bar controls to have identification labels. There shall be a 3/4" drain control furnished in the supply line to the front spray bar.



GENERAL FIRE APPARATUS 4004 EAST TRENT AVE. SPOKANE, WA 99202
YOUR SINGLE SOURCE FOR SALES & SERVICE SINCE 1957

